


### Wiring Instructions

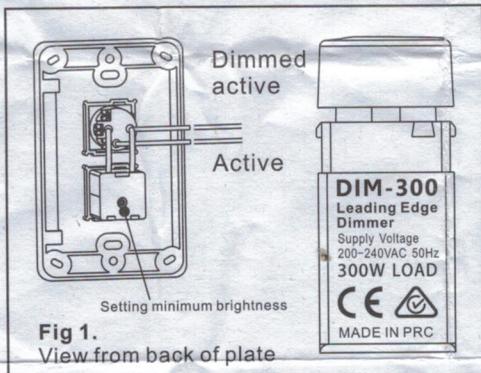

### Technical Specifications

|                |                 |
|----------------|-----------------|
| Dimming Method | Leading edge    |
| Supply Voltage | 200-240VAC 50Hz |
| Load Wattage   | 300W MAX        |
| Ta             | 0...+40°C       |
| Weight         | 17g             |
| Warranty       | 3 years         |


### Compatible Loads

|   |     |
|---|-----|
| Incandescent                                    | YES |
| 240V Halogen                                    | YES |
| Low Voltage Halogen with Electronic Transformer | YES |
| Low Voltage Halogen with Wire Wound Transformer | NO  |
| Dimmable CFL                                    | YES |
| Dimmable LED                                    | YES |
| 240V GU10 Halogen Downlight                     | YES |
| Fan Motor                                       | NO  |

- Minimum brightness can be set before the knob is put into place.


### Important Note

- When used in ambient temperatures greater than 25°C, the dimmer must be de-rated according to the Fig 2.

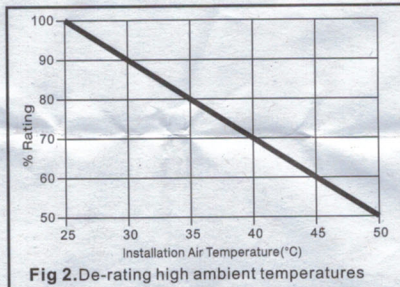

- Pls note that the flicker will be caused by the unstable input voltage.

### Wiring Diagrams

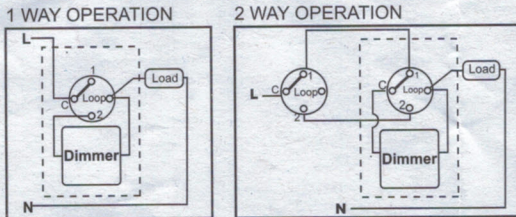

MADE IN PRC